


Swing joint

Features

- Body in Hi-Impact PVC
- 360° rotation in three directions
- Essential for perfect ground leveling of sprinklers
- Ready-made assembly that simplifies and speeds up installation of irrigation systems

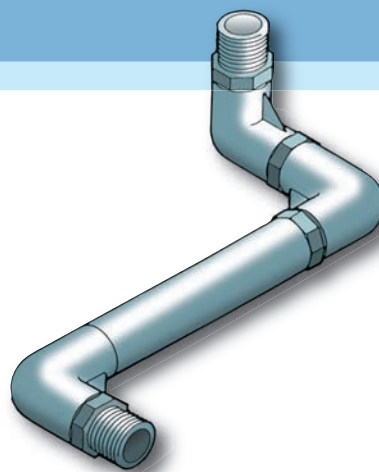

Specifications

- Thread: 1" e 1 1/2" male
- Maximum operating pressure: 13,6 bar at 22°C

Codification

Code	Description
IT-TPK025	Swing Joint of 2 x 1" male, 30,5 cm
IT-TPK040	Swing Joint of 2 x 1 1/2" male, 30,5 cm

Antivandalism union

Features

- Prevents malfunction of the system due to tampering

Specifications

- Thread: 1/2" e 3/4"



Codification

Code	Description
TAV015	Antivandalism Union 1/2" M x 3/4" F
TAV020	Antivandalism Union 3/4" M x 3/4" F