


Waterproof connector

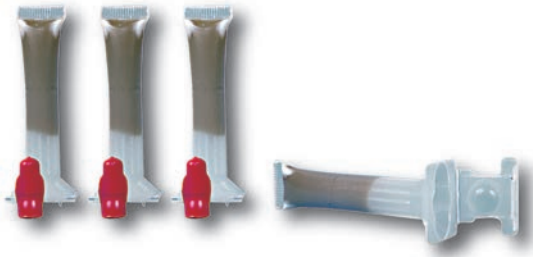

Features

- Waterproof connection
- Operating temperature: 105°C maximum
- Housing section cables: 2, 5, 6, 10 mm²
- For cables with section less than 1 mm² is necessary strip, fold them on themselves, rolling them into and put them in yellow clamp

Specifications

- Yellow clamps: 2 – 6 mm²
- Red clamps: 5 – 10 mm²
- Suitable for electrical connection up to 30 V

Codification

Code	Description
IT-VCCDBY	Plastic tube with insulating Gel for yellow clamp. Section 2-6 mm ²
IT-VCCDBR	Plastic tube with insulating Gel for red clamp. Section 5-10 mm ²

Blazing waterproof connectors

Features

- Superior wire restraint and an ease of use that is unrivaled
- Filled with high grade silicone that won't harden or run



Specifications

- Blue connector for cable from 0,5 to 1,5mm²
- Yellow connector for flexible cable from 0,5 to 1,5 mm² and stiff cable from 2,0 to 3,5 mm²
- Suitable for electrical system up to 50V – 10 A
- Resistant to temperatures up to 107°C
- UL486D listed (CEI EN 60947-7-1/-2)

Codification

Code	Description
BVS-1	Blazing waterproof connector 0,5 – 1,5 mm ² - Blue
BVS-2	Blazing waterproof connector 0,5 – 3,5 mm ² - Yellow